


PathMat™

T: +44 (0)1621 874200
F: +44 (0)1621 874299

Product Data Sheet

Issue: 01 Date: 05.12.12

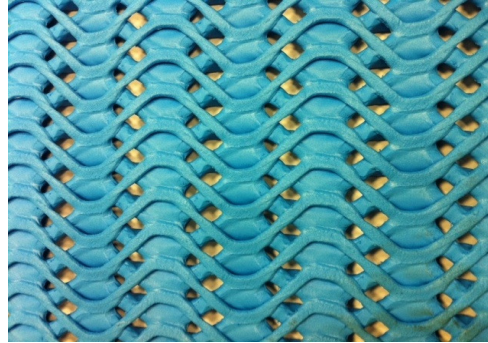

Nominal Characteristics	Test Method	
Structure		Oscillated
Polymer		UV stabilised Elastomeric polyethylene blend
Colour		Light Blue
Tensile strength MD (kN/m)	ISO 10319	16
Tensile elongation MD (%)		130
Compression at 200kPa (%)	ASTM 1621	22

Nominal dimensions	
Mesh weight/m ² (kg)	4
Mesh weight/linear m (kg)	6.25
Roll width (m)	1.56
Roll length (m)	10
Roll weight (kg)	62.5

As part of its continual improvement process Fiberweb Geosynthetics Ltd reserve the right to change the properties listed on this data sheet without prior notice.

TM indicates a trade mark of Fiberweb plc or a Fiberweb Group company, many of which are registered in a number of countries around the world.